

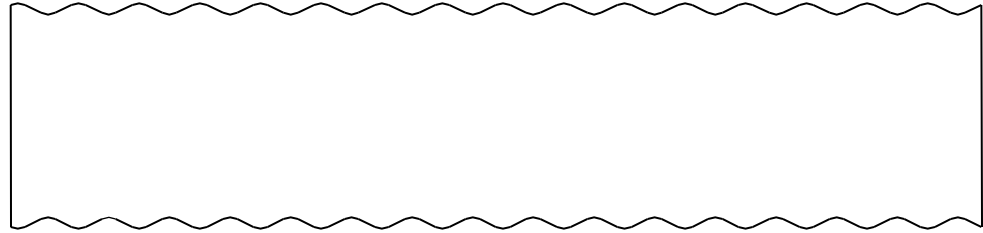


Aluminized Type II Corrugated Steel Pipe

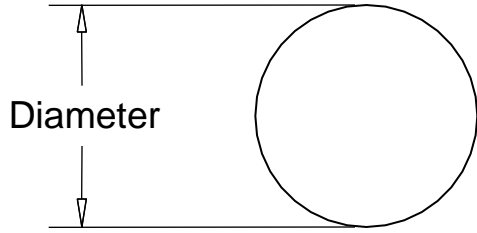

Corrugation Diagram

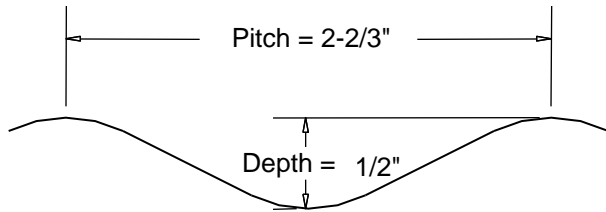

Diameter	Gage

Corrugated steel pipe manufactured in accordance with AASHTO M36. The aluminized steel used in the manufacture of this pipe shall conform to AASHTO M274. Pipe meets current H20/H25 Live load. Backfill material to a distance of 12" above the pipe shall meet the requirements of AASHTO M 145 for A1, A2, and A3 materials. The backfill shall be placed and compacted in 8" to 12" loose lift thickness To 90% standard Proctor (AASHTO T99) density.

Date:

Project Name:

Salesman Name:

Client Name:

Contact Name:



202 Morrell St.
Charlotte, Michigan 48813